


universally interchangeable radial segment

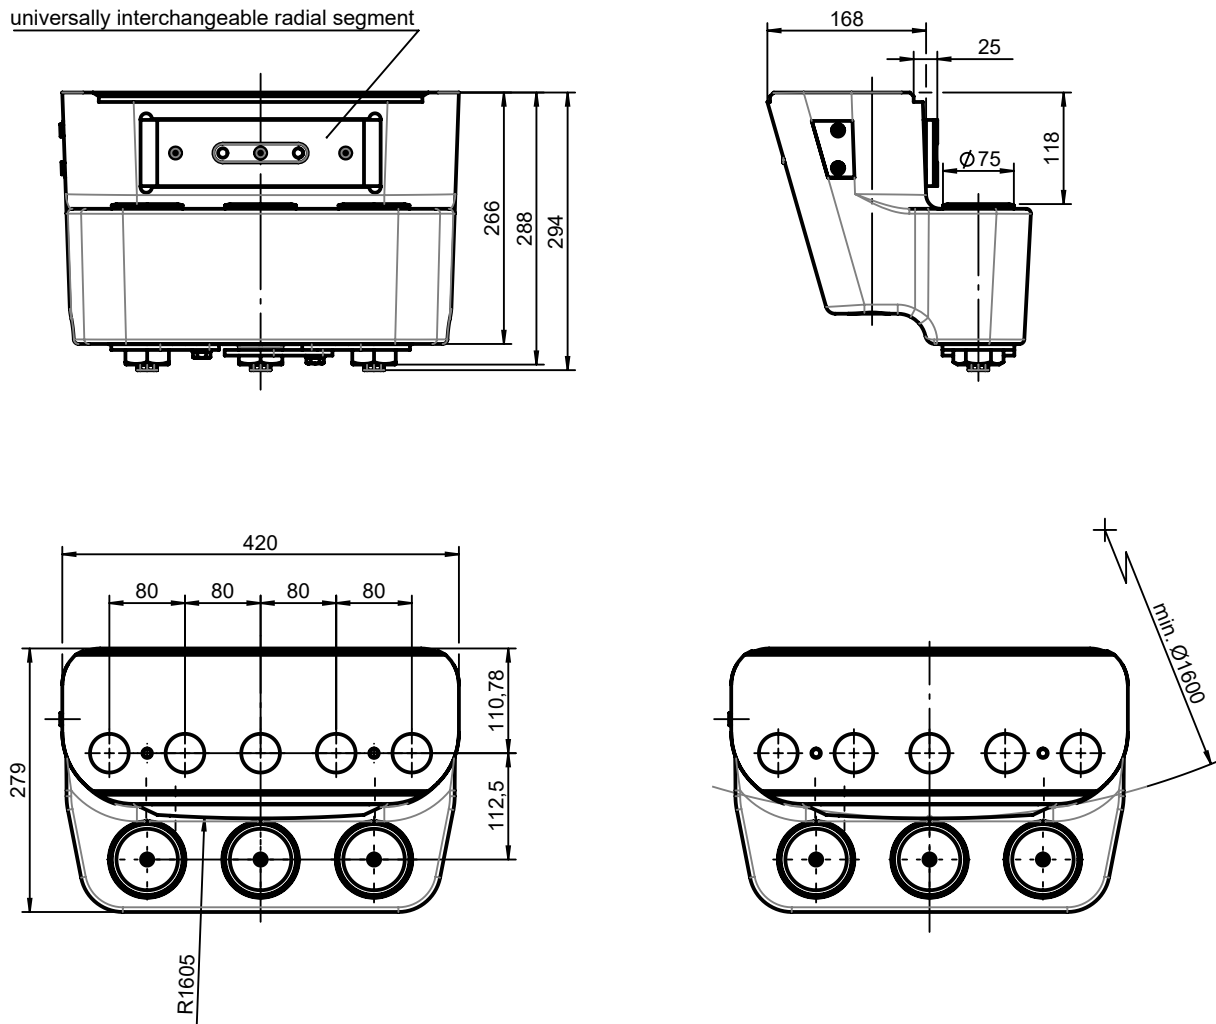

### TECHNICAL DATA

Contact force $F_A$	300kN
Pad Area	100 cm <sup>2</sup>
Yaw pitch circle diameter (PCD)	min. 1600 mm
Survival temperature	-40 / +60 °C
Operation temperature	-30 / +55 °C
Weight	200 kg
Theor. friction coefficient	0,3 - 0,4 $\mu$
Straight bore hole row interface for universal use	5xM39

### SPECIAL EQUIPMENT

- Radial segment with different material (e.g. JHS-PETP)
- Service and handling tools
- Full engineering package of SBS system available
- Pre-design study
- Full global FEM analysis
- Yaw system design assessment